

S14

FIXED FORK SPREADERS


The fixed fork spreader has been designed for the occasional handling of particularly long and instable loads such as plastic tubes, sheet metal board etc. The fork mounted attachment with slip-on shoes can be slipped onto the truck forks so that the load is distributed on additional forks.

If the load to be handled has a particularly low ground clearance, we recommend using the carriage mounted fixed fork spreader. If combined with QD hooks, the attachment can be mounted without the use of tools.

S14



Fixed Fork Spreaders, Slip-On Type

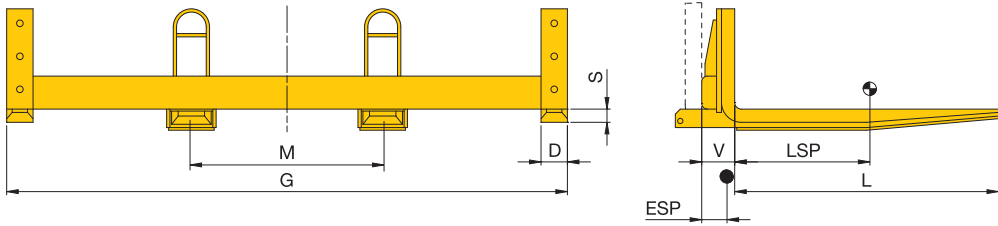

Forks serially bolted on

Model	Load capacity	LC (LSP)	G	D	S	L	V	CoG (ESP)	Weight	Price	Surcharge per 100 mm add. fork and shoe length
	kg	mm	mm	mm	mm	mm	mm	mm	kg		
S 14 - LGTSCH 15	1500	500	2000	80	40	1200	100	360	190		
	1500	500	3000	80	40	1200	100	300	240		
S 14 - LGTSCH 25	2500	500	2500	120	40	1200	120	330	305		
	2500	500	3500	120	40	1200	120	285	365		
S 14 - LGTSCH 30	3000	500	3000	125	45	1200	140	315	380		
	3000	500	4000	125	45	1200	140	270	480		
S 14 - LGTSCH 40	4000	500	3500	125	45	1200	160	320	465		
	4000	500	5000	125	45	1200	180	290	575		
S 14 - LGTSCH 45	4500	600	4000	140	50	1200	180	320	550		
	4500	600	5500	140	50	1200	200	275	740		
S 14 - LGTSCH 50	5000	600	4000	140	50	1200	180	300	610		
	5000	600	6000	140	50	1200	200	255	830		

- Not suited for sideloaders.

- Please indicate fork dimensions and fork distance M (center to center) when ordering.




Model S 14-LGTSCH

- to be slipped onto forks
- easy mounting
- excellent visibility
- usable length independent of the truck's forks

S14

Fixed Fork Spreader, Hook-On Type

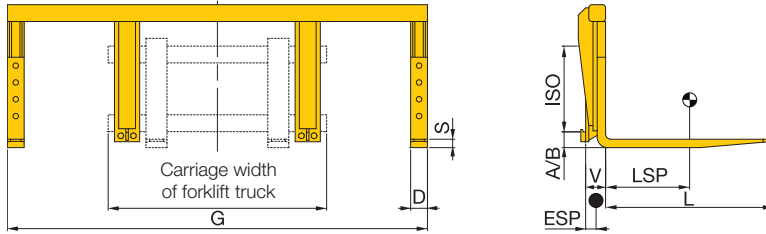

Forks serially bolted on

Model	Load capacity	LC (LSP)	ISO	G	D	S	L	V	CoG (ESP)	Weight	Price	Surcharge per 100 mm add. fork length
	kg	mm		mm	mm	mm	mm	mm	mm			
S 14 - LGT 15	1500	500	2	2000	80	40	1200	100	185	200		
	1500	500	2	3000	80	40	1200	100	160	250		
S 14 - LGT 25	2500	500	2	2500	120	40	1200	120	200	305		
	2500	500	2	3500	120	40	1200	120	180	365		
S 14 - LGT 30	3000	500	3	3000	125	45	1200	135	190	380		
	3000	500	3	4000	125	45	1200	135	170	460		
S 14 - LGT 40	4000	500	3	3500	125	45	1200	145	185	470		
	4000	500	3	5000	125	45	1200	145	160	570		
S 14 - LGT 45	4500	600	3	4000	140	50	1200	165	195	570		
	4500	600	3	5500	140	50	1200	165	160	760		
S 14 - LGT 50	5000	600	3/4	4000	140	50	1200	170	175	700		
	5000	600	3/4	6000	140	50	1200	170	145	930		

- Version with QD hooks incl. support feet on request.
- Design for sideloader can deviate from image.



Model S 14-LGT

- to be mounted on fork carriage
- low effective lost load center
- low ground clearance possible
- universal applications

Fixed Fork Spreaders in Use



S14